

Under Development	
Mass production	●

High Power Emitter LED

P/N: PWD3C0G1 (White)



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES





Features

- Long operating life
- Highest flux
- Wide range of colours: 2500K-25000K
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Superior ESD protection
- Eutectic die bonding
- RoHS compliant

Applications

- Reading lights (car, bus, aircraft)
- LCD Backlights/light Guides
- Fiber optic alternative/ Decorative / Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commercial and Residential Architectural
- Cove/Under shelf/Task
- Bollards/Security/Garden
- Portable (flashlight, bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (Stop-Tail-Turn, CHMSL, Mirror Side Repeat)
- Traffic signaling / Beacons / RailCrossing and Wayside

Radiation Pattern

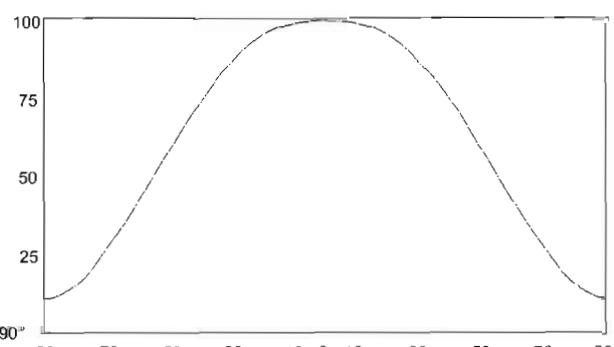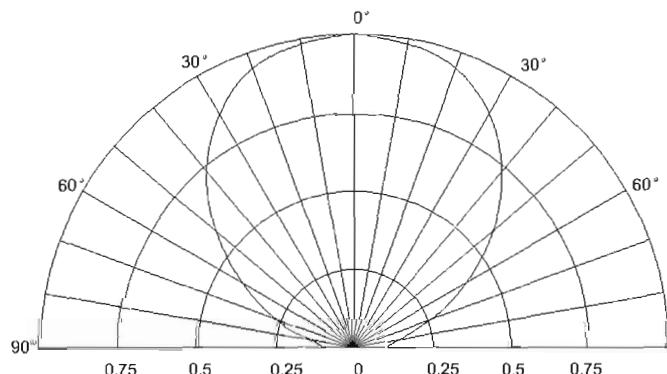

High Power Emitter LED**P/N: PWD3C0G1 (White)****Typical Optical/ Electrical Characteristics @T_J=25°C**

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	IF=2.4A	--	4	--	V
Reverse Current	I _R	VR=5v	--	--	50	uA
50% Power Angle	2θ1/2	IF=2.4A	110	--	140	deg
Luminous Intensity	Φv	IF=2.4A	220	420	--	lm
Recommend Forward Current	I _F	--	--	1.6	--	A
Chromaticity	Tc	IF=2.4A	5000	--	10000	k

The sample delivers goods data

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Φv	IF=2.4A	280	--	314	lm
50% Power Angle	2θ1/2		--	--	--	deg
Forward Voltage	V _F		7.5	8	--	V
Chromaticity	Tc		7500	—	8000	k
White Color Region				--		
ChromaticityCoordinates			X=--		Y=--	

Notes:

- 1.Tolerance of measurement of forward voltage±0.1V.
- 2.Tolerance of measurement of peak Wavelength±2.0nm.
- 3.Tolerance of measurement of luminous intensity±15%.

Absolute Maximum Rating

Item	Symbol	Absolute Maximum Rating		Unit
Forward Current	I _F	2.4		A
Peak Forward Current*	I _{FP}	2.5		A
Reverse Voltage	V _R	5		V
Power Dissipation	P _D	10		W
Electrostatic discharge	E _{SD}	±2000		V
Operation Temperature	T _{OPR}	-40~+80		°C
Storage Temperature	T _{STG}	-40~+100		°C
Lead Soldering Temperature*	T _{SOL}	Max. 260°C for 3sec Max.		

*IFP Conditions: Pulse Width≤10msec duty≤1/10

* All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment.


*Please don't add or change wires,while LEDS is running

* The LED of this a series can lead the heat reflux of 250 Celsius degrees Han but be free from damage.

High Power Emitter LED
P/N: PWD3C0G1 (White)

Under Development	Mass production
●	


Typical Optical/Electrical Characteristics Curves
($T_J=25^\circ\text{C}$ Unless Otherwise Noted)

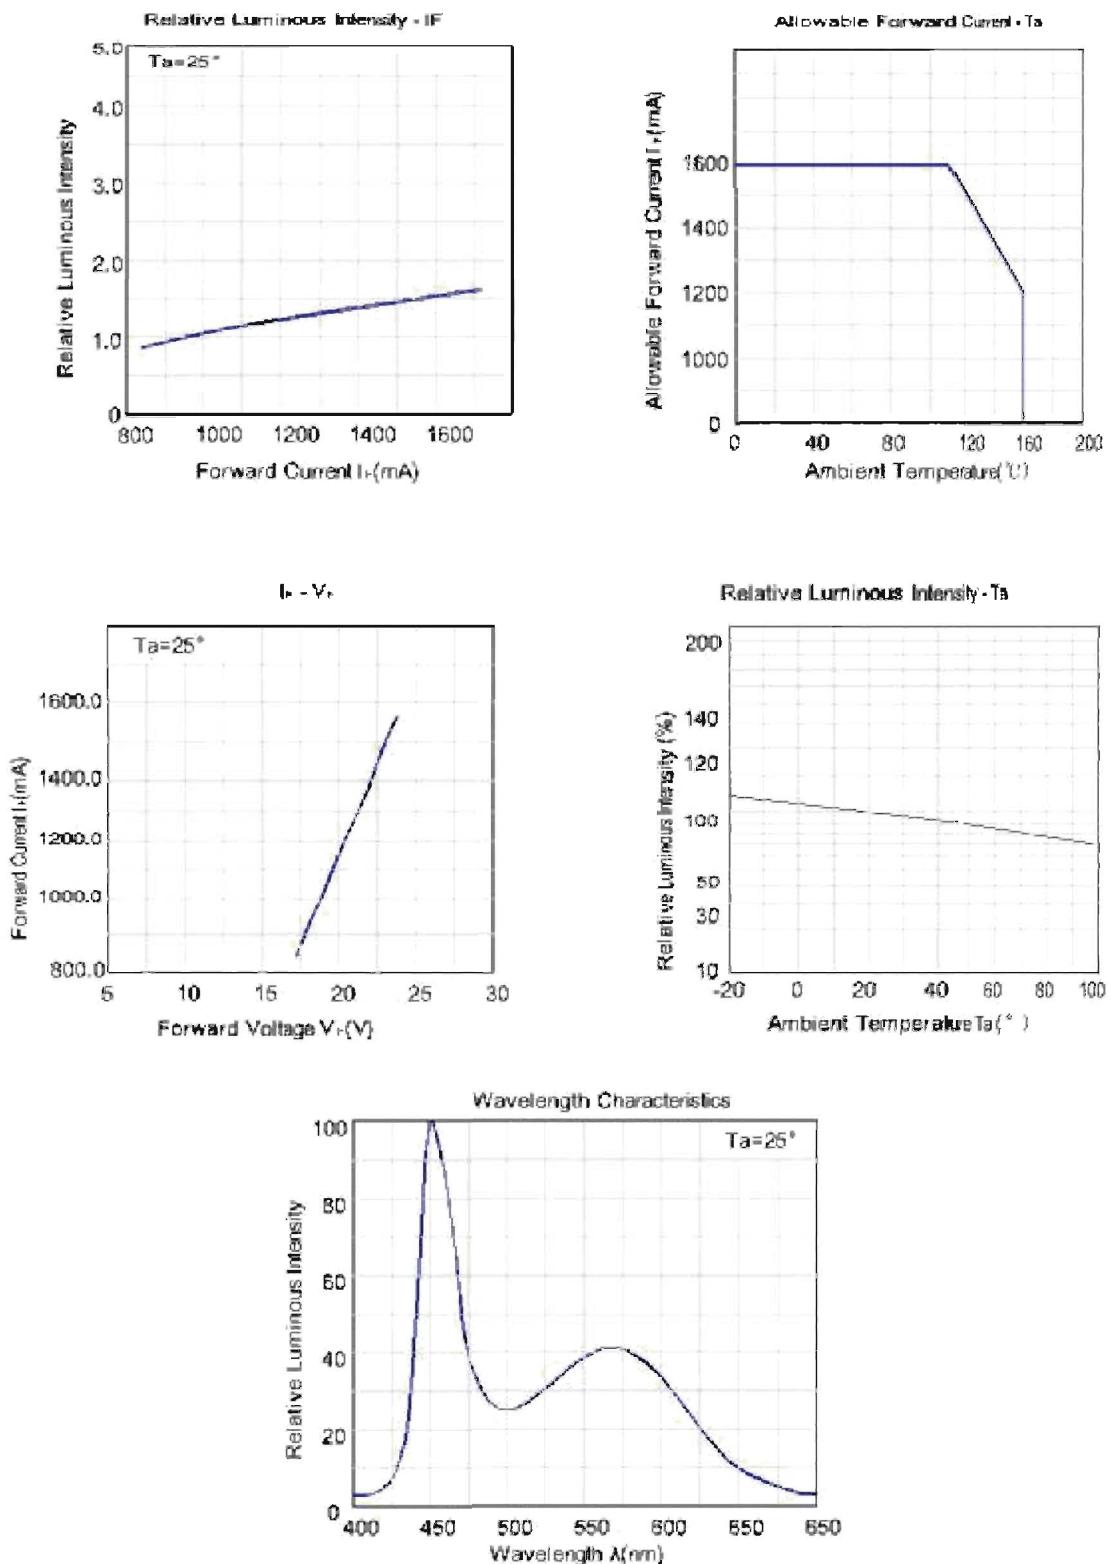

High Power Emitter LED
P/N: PWD3C0G1 (White)

Under Development	
Mass production	●

Package Dimensions

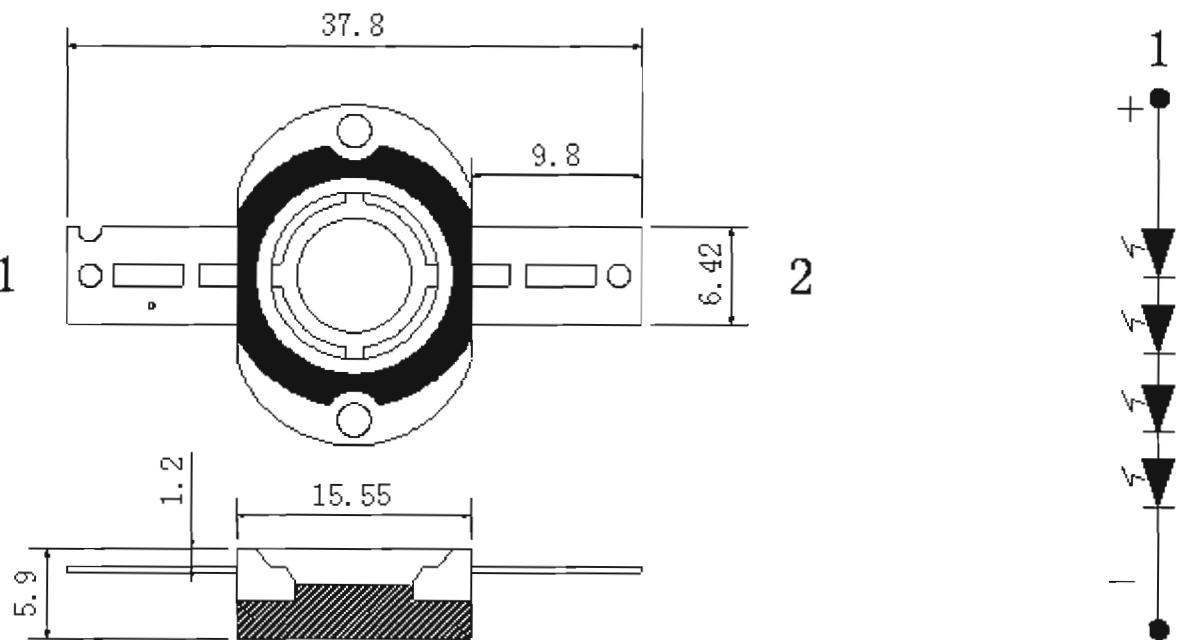

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.